


**IN THE CLAIMS:**


The listing of claims will replace all prior versions, and listings, of claims in the application:

**Listing of Claims:**

1. (Currently Amended) A method for applying a reactive epoxy containing coating to a substrate, said method comprising subjecting said substrate to a pulsed plasma discharge in the presence of a compound of formula (I) or (IA)



(I)



(IA)


where  $R^1$  or  $R^{1a}$  is a ~~an optionally substituted~~ hydrocarbyl group, optionally substituted by a halo group, or a heterocyclic group;

$R^2$  is a ~~an optionally substituted~~ straight or branched alkylene chain, optionally substituted by a halo group; and

Y is oxygen or a bond,

wherein the pulsed plasma discharge has a duty cycle of between 1:500 and 1:1000.


2. (Previously Presented) A method according to claim 1 wherein the epoxy containing organic compound is a compound of formula (II)

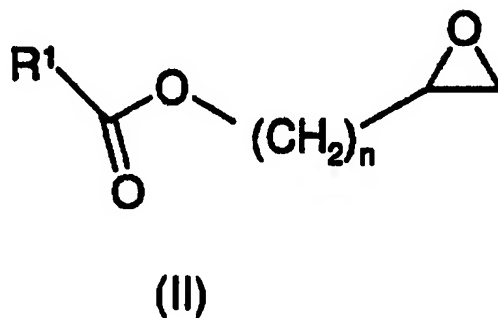

where R<sup>1</sup> is as defined in claim 1 and n is an integer of from 1 to 20.

3. (Previously Presented) A method according to claim 2 wherein, in the compound of formula (II), n is 1 to 3.

4. (Previously Presented) A method according to claim 3 wherein the compound of formula (II) is a compound of formula (III)

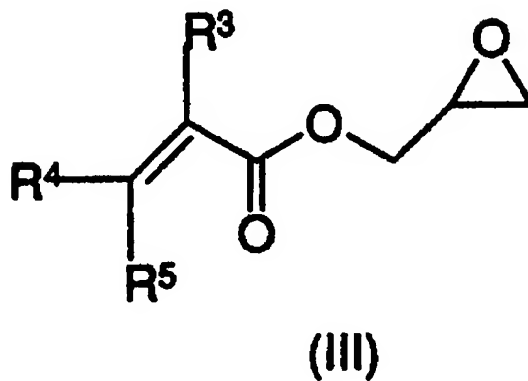

where R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup> are independently selected from hydrogen or C<sub>1-6</sub>alkyl.

5. Cancelled.

6. (Previously Presented) A method according to claim 2 wherein the plasma discharge is pulsed and the average power of the pulsed plasma discharge is less than  $0.05\text{W}/\text{cm}^3$ .

7. (Currently Amended) A method according to claim 5 1 wherein the pulsed plasma discharge is applied such that power is on for  $20\mu\text{s}$  and off for from  $10000\mu\text{s}$  to  $20000\mu\text{s}$ .

8. (Withdrawn) A substrate having an epoxy containing coating thereon, obtained by a process according to claim 1.

9-11. Cancelled.

12. (Currently Amended) A method for immobilisation of a nucleophilic reagent at a surface, said method comprising the application of a reactive epoxy containing coating to said surface by a method according to claim 1, and then contacting the surface with a solution of said nucleophilic ~~agent~~ reagent under conditions such that the nucleophilic ~~agent~~ reagent reacts with the epoxy groups.

13. (Withdrawn) A method for adhering two surfaces together, said method comprising applying a reactive coating to at least one of said surfaces by plasma deposition, and contacting said surface with the other surface under conditions whereby reactive groups in the coating will react so as to secure the two surfaces together.

14. (Withdrawn) A method according to claim 13, wherein the applying of the reactive coating to at least one of the said surfaces is performed using a method according to claim 1.

15. (Withdrawn) A method according to claim 13 comprising the applying of a reactive coating to both said surfaces by plasma deposition, introducing a coupling agent between said surfaces, and allowing said coupling agent to react with reactive groups on each surface.

16. (Withdrawn) A method according to claim 15 wherein the reactive groups are epoxide groups.

17. (Withdrawn) A method according to claim 15 wherein said coupling agent is a diamine.

18. (Withdrawn) A method according to claim 13 wherein said other surface includes nucleophilic groups able to react with said reactive groups so as to bring about adhesion.

19. (Withdrawn) A method according to claim 18 wherein said nucleophilic groups are selected from amino or carboxylic acid groups.

20. (Withdrawn) A method for applying a reactive epoxy containing coating to a substrate substantially as hereinbefore described with reference to example 1.

21. (New) The method of Claim 12, wherein the nucleophilic reagent is a carboxylic acid or amine.